Article code: BX1OSL-830E-D400

Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Illustrations may only be similar and serve as an orientation.

Basic-X1. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D=400mm. H=55+25mm. Low-power current. 2665lm. 19W. 3,6kg.

Binning initial <= MacAdam 3. Protection class: IP40. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

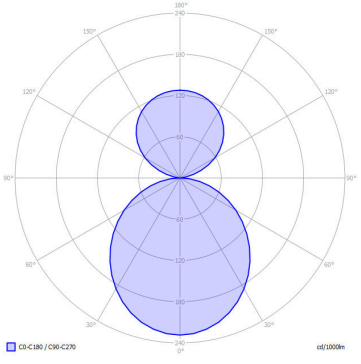

© Lightnet GmbH, Zollstockgürtel 65, D-50969 Köln, Tel. +49 (0) 221 22 25 26-0, Fax +49 (0) 221 22 25 26-99, info@lightnet.de, www.lightnet.de
We reserve the right to make mistakes or modifications. Illustrations may only be similar and serve as an orientation. Kindly always check you are working with current version of mounting instruction.

Article code: BX1OSL-830E-D400

Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Customer / Project: _____

Note: _____

_____

Productname	Basic-X1
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=400mm
Height H (mm)	H=55+25mm
Current/Power	Low-Power
Luminous Flux	2665lm
Watt	19W
Degree of protection	IP40
Certification	ENEC
LED lifetime	L90B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3,6kg

© Lightnet GmbH, Zollstockgürtel 65, D-50969 Köln, Tel. +49 (0) 221 22 25 26-0, Fax +49 (0) 221 22 25 26-99, info@lightnet.de, www.lightnet.de
We reserve the right to make mistakes or modifications. Illustrations may only be similar and serve as an orientation. Kindly always check you are working with current version of mounting instruction.