

Basic-P5


Pendant luminaire - Direct/indirect light distribution



Illustrations may only be similar and serve as an orientation.

Basic-P5. LED. Pendant luminaire. Luminaire body with 38mm visible overall height and minimalist edge of only 5mm. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D=800mm. H=38mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max 1500mm. Power supply:

transparent. Ceiling rose: Matching luminaire`s surface colour. High-power current. 12120lm. 110W. 9,5kg. Binning initial <= MacAdam 3. Protection class: IP40. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

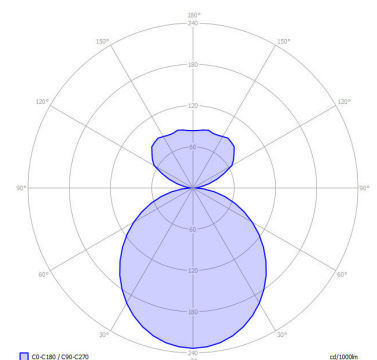

Basic-P5

Pendant luminaire - Direct/indirect light distribution

Customer / Project: _____

Note: _____



Productname	Basic-P5	LED lifetime	L80B10 (tq 25°C) = 50.000h
Lamp	LED	Photometric code	8 40 / 3 3 9
Installation Type	Pendant luminaire	Photobiological class	RG0 (EN62471)
Surface finish	Snow White	Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Light characteristics	Direct/indirect light distribution	Weight (kg)	9,5kg
Colour temperature	4000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Opal diffuser		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	D=800mm		
Height H (mm)	H=38mm		
Current/Power	High-Power		
Luminous Flux	12120lm		
Watt	110W		
Suspension	Central cord susp. (Set)		
Ceiling rose colour	Ceiling rose: Matching luminaire's surface colour		
Pendant length (mm)	Pendant length max 1500mm		
Degree of protection	IP40		
Certification	ENEC		
Cable Colour	Power supply: transparent		

