

## Wall mounting appliance inlet low voltage - housing dimensions 80x70




| Product description       |                                   |
|---------------------------|-----------------------------------|
| BALS-Prd.-Nr              | 4619                              |
| EAN                       | 4024941046190                     |
| Product category          | ELV wall mounting appliance inlet |
| Current                   | 32A                               |
| Number of poles           | 3p                                |
| Arrangement of phases     | 3P                                |
| Position of earth contact | 4 h                               |
| Voltage                   | 20 up to 25 and 40 up to 50V      |

| Product description    |                                                                                |
|------------------------|--------------------------------------------------------------------------------|
| Frequency              | 100 - 200Hz                                                                    |
| Protection degree      | IP44                                                                           |
| Colour code            | green RAL 6002                                                                 |
| Colour of appliance    | Housing bottom grey RAL 7035, Housing top grey RAL 7035, Collar green RAL 6002 |
| Connection design      | with screw terminal                                                            |
| Maximum conductor size | 10,0 qmm                                                                       |
| Cable entry            | top entry M25                                                                  |
| Height                 | 102mm                                                                          |
| Width                  | 70mm                                                                           |
| Depth                  | 63mm                                                                           |
| Dimension of enclosure | 80x70 mm (HxW)                                                                 |
| Material of enclosure  | Polyamide                                                                      |
| Contacts               | the contact carrier is made of polyamide, the contacts are brass               |

| Additional technical properties |                                    |
|---------------------------------|------------------------------------|
|                                 | The cable entry is one at top open |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.151 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941046190 |
| Length         | 63 mm         |
| Width          | 70 mm         |
| Height         | 102 mm        |
| Weight         | 0.152 kg      |
| Volume         | 449.82 ccm    |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941837316 |
| Length         | 245 mm        |
| Width          | 177 mm        |
| Height         | 185 mm        |
| Weight         | 1.643 kg      |
| Volume         | 7,140 ccm     |

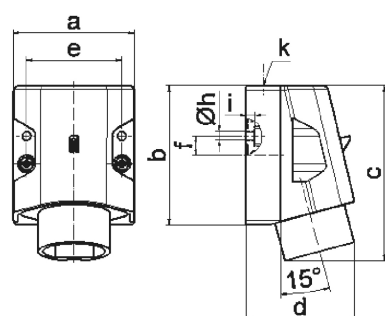

16 MB 15

| Ampere         | 16    | 16    | 32    | 32    |  |  |
|----------------|-------|-------|-------|-------|--|--|
| Polzahl        | 2     | 3     | 2     | 3     |  |  |
| a              | 70,0  | 70,0  | 70,0  | 70,0  |  |  |
| b              | 80,0  | 80,0  | 80,0  | 80,0  |  |  |
| c              | 100,0 | 100,0 | 100,0 | 100,0 |  |  |
| d              | 82,0  | 82,0  | 82,0  | 82,0  |  |  |
| e              | 55,0  | 55,0  | 55,0  | 55,0  |  |  |
| f              | 11,0  | 11,0  | 11,0  | 11,0  |  |  |
| h ø            | 5,2   | 5,2   | 5,2   | 5,2   |  |  |
| i              | 5,0   | 5,0   | 5,0   | 5,0   |  |  |
| k              | M25   | M25   | M25   | M25   |  |  |
| Leiter mm² min | 4     | 4     | 4     | 4     |  |  |
| Leiter mm² max | 10    | 10    | 10    | 10    |  |  |
|                |       |       |       |       |  |  |
|                |       |       |       |       |  |  |