

## Basic-X1


Surface mounted luminaire - Direct/indirect light distribution



Illustrations may only be similar and serve as an orientation.

Basic-X1. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable. DxH (round). D=600mm. H=55+25mm. Low-

power current. 8490lm. 52W. 7,8kg. Binning initial <= MacAdam 3. Protection class: IP40. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

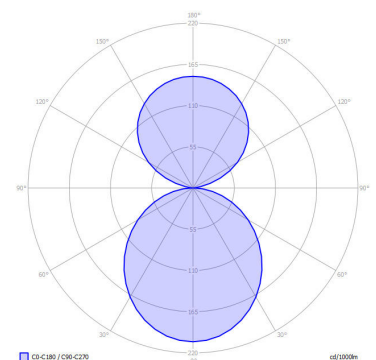

# Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_  
 \_\_\_\_\_



|                              |                                    |
|------------------------------|------------------------------------|
| Productname                  | Basic-X1                           |
| Lamp                         | LED                                |
| Installation Type            | Surface mounted luminaire          |
| Surface finish               | Snow White                         |
| Light characteristics        | Direct/indirect light distribution |
| Colour temperature           | 4000K                              |
| Colour Rendering Index (CRI) | CRI>80                             |
| Optical system               | Opal diffuser                      |
| Control                      | Switchable                         |
| Length L/Diameter D (mm)     | D=600mm                            |
| Height H (mm)                | H=55+25mm                          |
| Current/Power                | Low-Power                          |
| Luminous Flux                | 8490lm                             |
| Watt                         | 52W                                |
| Degree of protection         | IP40                               |
| Certification                | ENEC                               |
| LED lifetime                 | L90B10 (tq 25°C) = 50.000h         |
| Photometric code             | 8 40 / 3 3 9                       |
| Photobiological class        | RG0 (EN62471)                      |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C     |
| Weight (kg)                  | 7,8kg                              |

