

## Panel mounting socket outlet straight - flange 75x75 fixing centers 60x60




| Product description       |                                                         |
|---------------------------|---------------------------------------------------------|
| BALS-Prd.-Nr              | 13822                                                   |
| EAN                       | 4024941138222                                           |
| Product category          | TE panel mounting socket outlet QUICK-CONNECT, straight |
| Current                   | 32A                                                     |
| Number of poles           | 5p                                                      |
| Arrangement of phases     | 3p+N+PE                                                 |
| Position of earth contact | 1 h                                                     |

| Product description            |                                                                                                                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage                        | > 50V for all other not classified voltages and/or frequencies. This time position can additionally process in special applications, in which a distinction to standardized positions needed to be used. |
| Protection degree              | IP44                                                                                                                                                                                                     |
| Colour code                    | grey RAL 7035                                                                                                                                                                                            |
| Colour of appliance            | Hinged lid grey RAL 7035, Enclosure grey RAL 7035                                                                                                                                                        |
| Connection design              | screwless spring terminals with KONTEX-contact                                                                                                                                                           |
| Maximum conductor size         | 10,0 qmm                                                                                                                                                                                                 |
| Cable entry                    | other                                                                                                                                                                                                    |
| Height                         | 99mm                                                                                                                                                                                                     |
| Width                          | 75mm                                                                                                                                                                                                     |
| Depth                          | 116mm                                                                                                                                                                                                    |
| Flange size vertical in mm     | 75mm                                                                                                                                                                                                     |
| Flange size horizontal in mm   | 75mm                                                                                                                                                                                                     |
| Drill hole dist. vertical mm   | 60mm                                                                                                                                                                                                     |
| Drill hole dist. horizontal mm | 60mm                                                                                                                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                                                                                                                |
| Contacts                       | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated                                                                                                 |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.21 kg / Piece |
| Packaging      | Bag             |

| Logistics data |               |
|----------------|---------------|
| Content amount | 1 ST          |
| EAN            | 4024941138222 |
| Length         | 116 mm        |
| Width          | 75 mm         |
| Height         | 99 mm         |
| Weight         | 0.211 kg      |
| Volume         | 861.3 ccm     |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941836166 |
| Length         | 128 mm        |
| Width          | 225 mm        |
| Height         | 399 mm        |
| Weight         | 2.359 kg      |
| Volume         | 11,491.2 ccm  |

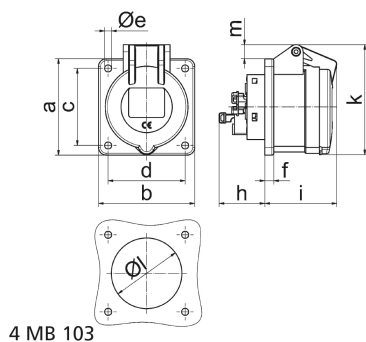

| Ampere Polzahl | 16 3 | 16 4 | 16 5 | 32 3 | 32 4 | 32 5 |
|----------------|------|------|------|------|------|------|
| a              | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 |
| b              | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 | 75,0 |
| c              | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |
| d              | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |
| e ø            | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  | 5,5  |
| f              | 7,0  | 7,0  | 7,0  | 8,0  | 8,0  | 8,0  |
| h              | 35,5 | 35,5 | 35,5 | 50,0 | 50,0 | 50,0 |
| i              | 52,0 | 53,0 | 57,0 | 65,0 | 65,0 | 66,0 |
| k              | 71,5 | 80,0 | 86,0 | 91,0 | 91,0 | 99,0 |
| l ø            | 45,0 | 45,0 | 55,0 | 60,0 | 60,0 | 60,0 |
| m              | 3,5  | 7,0  | 11,5 | 12,0 | 12,0 | 17,0 |
| Leiter mm² min | 1,5  | 1,5  | 1,5  | 2,5  | 2,5  | 2,5  |
| Leiter mm² max | 4    | 4    | 4    | 10   | 10   | 10   |