

## Cubic-X2


Surface mounted luminaire - Direct/indirect light distribution



Illustrations may only be similar and serve as an orientation.

Cubic-X2. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Dimmable DALI. LxWxH (square). L=630mm. W=

630mm. H=55+20mm. Medium-power current. 9610lm. 68W. 10,4kg. Binning initial <= MacAdam 3. Protection class: IP20. Protection class I. CE Declaration of Conformity. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

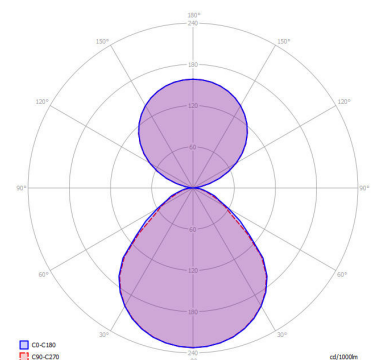

# Cubic-X2

Surface mounted luminaire - Direct/indirect light distribution

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_  
 \_\_\_\_\_



Productname	Cubic-X2	Weight (kg)	10,4kg
Lamp	LED		
Installation Type	Surface mounted luminaire		
Surface finish	Silver Anodised		
Light characteristics	Direct/indirect light distribution		
Colour temperature	4000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Microprismatic screen		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	L=630mm		
Width W (mm)	W=630mm		
Height H (mm)	H=55+20mm		
Current/Power	Medium-Power		
Luminous Flux	9610lm		
Watt	68W		
Degree of protection	IP20		
LED lifetime	L85B10 (tq 25°C) = 50.000h		
UGR	UGR<=19		
Photometric code	8 40 / 3 3 9		
Photobiological class	RG0 (EN62471)		
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C		

