



Model No.: **GP900DH**


Type	: Rechargeable Nickel Metal Hydride Cylindrical Cell
Nominal Dimension (with Sleeve)	: $\Phi = 33.0\text{mm}$ H = 60.0mm
Applications	: Recommended discharge current 1800mA to 45A(continuous) (momentary) 120A
Nominal Voltage	: 1.2V
Capacity	: Rated: 9000mAh Typical: 9225mAh When discharged at 1800mA to 1.0V at 20°C
Charging Condition	: 900mA for 16hrs at 20°C
Fast Charge	: 4.5A to 9A (0.5 to 1.0C) charge termination control recommended control parameters: - ΔV : 0-5mV DT/dt : 0.8°C/min TCO : 50 – 55°C Timer : 105% nominal input (secondary)
Charge Retention	: 50% of nominal capacity after cell storage at 20°C for 12months When discharged at 1.8A to 1.0V at 20°C
Service Life	: > 500 cycles (IEC standard)
Continuous Overcharge	: 900mA maximum current for 1 year. No conspicuous deformation and/or Leakage
Weight	: 170g
Internal Resistance	: Average 6m Ω upon fully charged (Max: 8m Ω) at 1000Hz
Max. Charging Voltage	: 1.5V at 900mA charging
Ambient Temperature Range	: Standard Charge : 0 to 40°C Fast Charging : 10 to 40°C Discharge : -20 to 50°C Storage : -20 to 35°C Storage (1 week) : -20 to 60°C

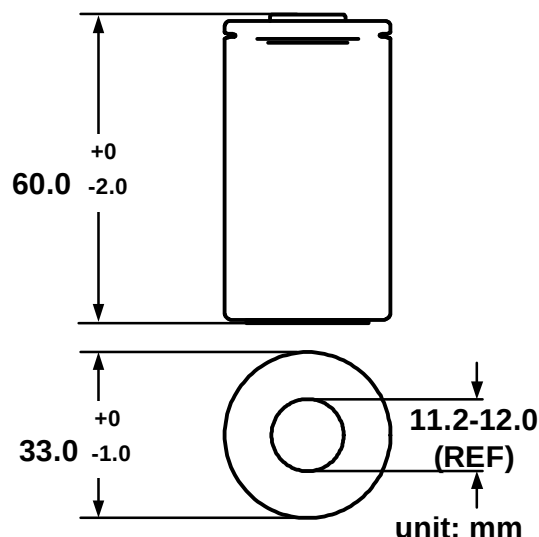


Voltage (V) **Low Rate Discharge**

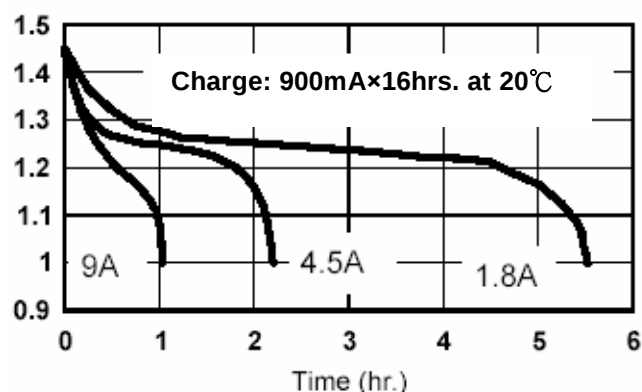

Fast Charge (Charge Control Required)

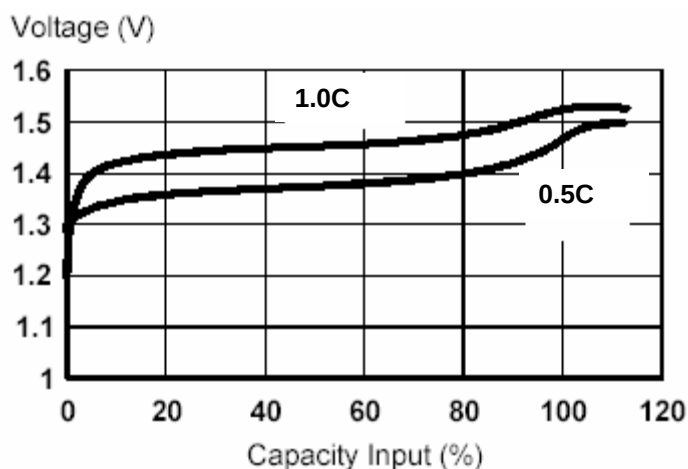

Voltage (V) **High Rate Discharge**

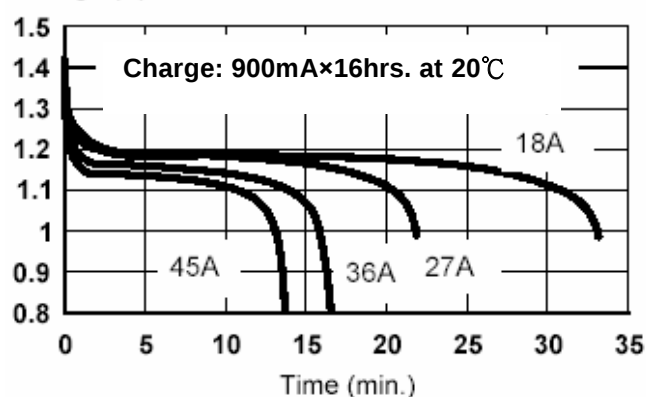

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.