

Matric-G3

Pendant light-line - Direct light distribution




Illustrations may only be similar and serve as an orientation.



Matric-G3. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. LxWxH (light line). L=2055mm. W=55mm. H=75mm. Y-cord suspension with power supply cable and ceiling rose (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose:

Matching luminaire`s surface colour. Medium-power current. 4850lm. 39W. 5kg. Binning initial <= MacAdam 3. Protection class: IP20. Protection class I. CE Declaration of Conformity. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

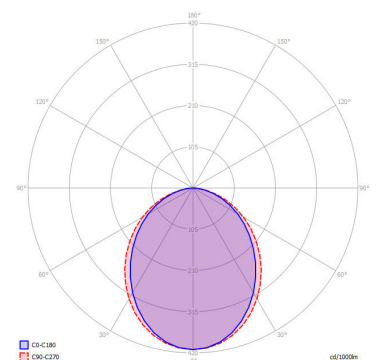

Matric-G3

Pendant light-line - Direct light distribution

Customer / Project: _____

Note: _____



Productname	Matric-G3	LED lifetime	L85B10 (tq 25°C) = 50.000h
Lamp	LED	Photometric code	8 40 / 3 3 9
Installation Type	Pendant light-line	Photobiological class	RG0 (EN62471)
Surface finish	Silver Anodised	Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Light characteristics	Direct light distribution	Weight (kg)	5kg
Colour temperature	4000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Opal diffuser		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	L=2055mm		
Width W (mm)	W=55mm		
Height H (mm)	H=75mm		
Current/Power	Medium-Power		
Luminous Flux	4850lm		
Watt	39W		
Suspension	Y-susp. (Set)		
Ceiling rose colour	Ceiling rose: Matching luminaire's surface colour		
Pendant length (mm)	Pendant length max 1500mm		
Degree of protection	IP20		
Cable Colour	Power supply: transparent		

