

## Panel mounting socket outlet straight - flange 75x75 fixing centers 60x60




| Product description       |                                                      |
|---------------------------|------------------------------------------------------|
| BALS-Prd.-Nr              | 13756                                                |
| EAN                       | 4024941137560                                        |
| Product category          | Panel mounting socket outlet QUICK-CONNECT, straight |
| Current                   | 32A                                                  |
| Number of poles           | 4p                                                   |
| Arrangement of phases     | 3P+PE                                                |
| Position of earth contact | 6 h                                                  |
| Voltage                   | 380 - 415V~                                          |

| Product description            |                                                                              |
|--------------------------------|------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                      |
| Protection degree              | IP67                                                                         |
| Colour code                    | red RAL 3000                                                                 |
| Colour of appliance            | Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035 |
| Connection design              | screwless spring terminals with KONTEX-contact                               |
| Maximum conductor size         | 10,0 qmm                                                                     |
| Cable entry                    | other                                                                        |
| Height                         | 97mm                                                                         |
| Width                          | 94mm                                                                         |
| Depth                          | 111mm                                                                        |
| Flange size vertical in mm     | 75mm                                                                         |
| Flange size horizontal in mm   | 75mm                                                                         |
| Drill hole dist. vertical mm   | 60mm                                                                         |
| Drill hole dist. horizontal mm | 60mm                                                                         |
| Material of enclosure          | Polyamide                                                                    |
| Contacts                       | the contact carrier is made of polyamide, the contacts are brass             |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.217 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941137560 |
| Length         | 111 mm        |
| Width          | 94 mm         |
| Height         | 97 mm         |
| Weight         | 0.218 kg      |
| Volume         | 1,012.098 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941957939 |
| Length         | 122 mm        |
| Width          | 222 mm        |
| Height         | 538 mm        |
| Weight         | 2.508 kg      |
| Volume         | 14,332.32 ccm |

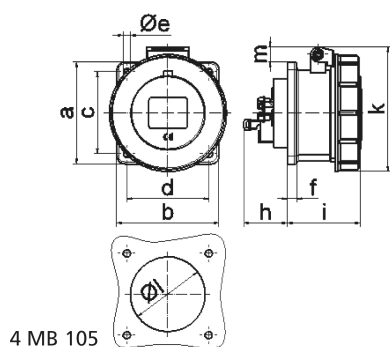

| Ampere         | 16   | 16   | 16   | 32    | 32    | 32    |
|----------------|------|------|------|-------|-------|-------|
| Polzahl        | 3    | 4    | 5    | 3     | 4     | 5     |
| a              | 75,0 | 75,0 | 75,0 | 75,0  | 75,0  | 75,0  |
| b              | 75,0 | 75,0 | 75,0 | 75,0  | 75,0  | 75,0  |
| c              | 60,0 | 60,0 | 60,0 | 60,0  | 60,0  | 60,0  |
| d              | 60,0 | 60,0 | 60,0 | 60,0  | 60,0  | 60,0  |
| e ø            | 5,5  | 5,5  | 5,5  | 5,5   | 5,5   | 5,5   |
| f              | 7,0  | 7,0  | 7,0  | 8,0   | 8,0   | 8,0   |
| h              | 35,5 | 35,5 | 35,5 | 46,0  | 46,0  | 46,0  |
| i              | 57,0 | 58,0 | 57,0 | 65,0  | 65,0  | 65,0  |
| k              | 76,0 | 83,0 | 93,0 | 100,0 | 100,0 | 106,0 |
| l ø            | 45,0 | 45,0 | 55,0 | 60,0  | 60,0  | 60,0  |
| m              | 3,5  | 7,0  | 11,5 | 12,0  | 12,0  | 17,0  |
| Leiter mm² min | 1,5  | 1,5  | 1,5  | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 4    | 4    | 4    | 10    | 10    | 10    |