

Basic-P1


Pendant luminaire - Direct/indirect light distribution



Illustrations may only be similar and serve as an orientation.

Basic-P1. LED. Pendant luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D= 500mm. H=75mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose: Matching

luminaire`s surface colour. Medium-power current. 7396lm. 50W. 6,7kg. Binning initial <= MacAdam 3. Protection class: IP40. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certified

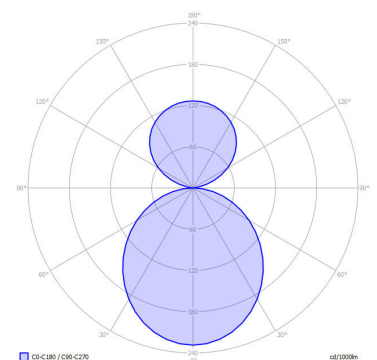

Basic-P1

Pendant luminaire - Direct/indirect light distribution

Customer / Project: _____

Note: _____



Productname	Basic-P1	LED lifetime	L85B10 (tq 25°C) = 50.000h
Lamp	LED	Photometric code	8 30 / 3 3 9
Installation Type	Pendant luminaire	Photobiological class	RG0 (EN62471)
Surface finish	Radiant Silver	Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Light characteristics	Direct/indirect light distribution	Weight (kg)	6,7kg
Colour temperature	3000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Opal diffuser		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	D=500mm		
Height H (mm)	H=75mm		
Current/Power	Medium-Power		
Luminous Flux	7396lm		
Watt	50W		
Suspension	Central cord susp. (Set)		
Ceiling rose colour	Ceiling rose: Matching luminaire's surface colour		
Pendant length (mm)	Pendant length max 1500mm		
Degree of protection	IP40		
Certification	ENEC		
Cable Colour	Power supply: transparent		

