


Matric-A5

Surface mounted light-line - Direct light distribution




Illustrations may only be similar and serve as an orientation.

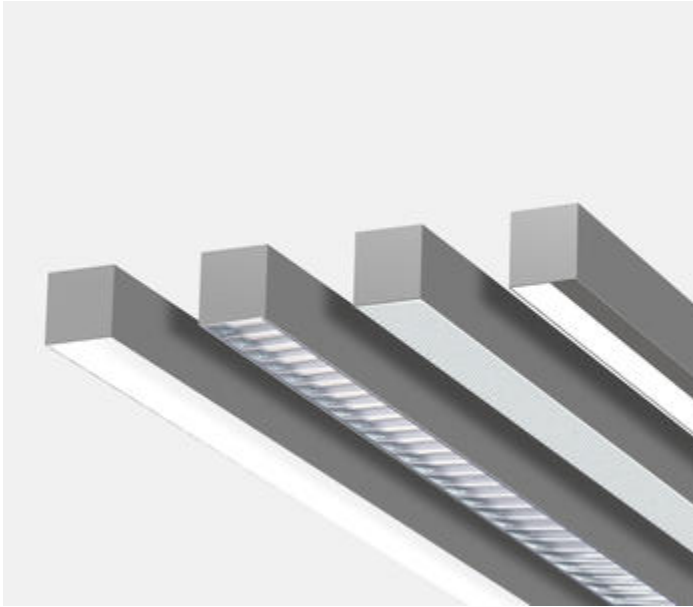

Matric-A5. LED. Wall or ceiling mounted light-line. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Dimmable DALI. LxWxH (light line). L= 1182mm. W=81mm. H=81mm. Low-power

current. 2020lm. 18W. 3,5kg. Binning initial <= MacAdam 3. Protection class: IP20. Protection class I. CE Declaration of Conformity. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

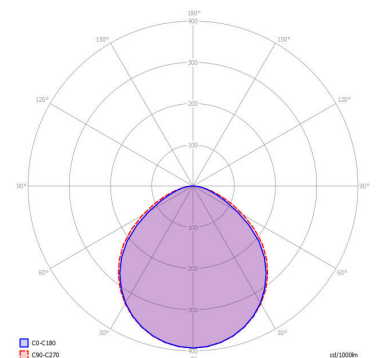


Matric-A5

Surface mounted light-line - Direct light distribution

Customer / Project: _____

Note: _____

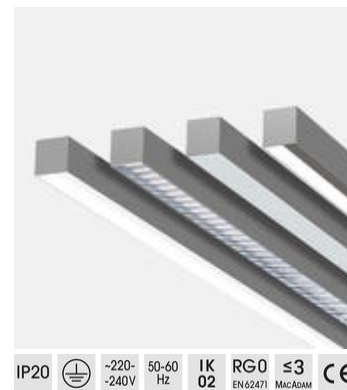

Productname	Matric-A5	Weight (kg)	3,5kg
Lamp	LED		
Installation Type	Surface mounted light-line		
Surface finish	Silver Anodised		
Light characteristics	Direct light distribution		
Colour temperature	3000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Microprismatic screen		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	L=1182mm		
Width W (mm)	W=81mm		
Height H (mm)	H=81mm		
Current/Power	Low-Power		
Luminous Flux	2020lm		
Watt	18W		
Degree of protection	IP20		
LED lifetime	L90B10 (tq 25°C) = 50.000h		
UGR	UGR<=19		
Photometric code	8 30 / 3 3 9		
Photobiological class	RG0 (EN62471)		
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C		

