

Basic-M4


Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution



Illustrations may only be similar and serve as an orientation.

Basic-M4. LED. Recessed mounted luminaire with surrounding frame for installation in ceilings with cut-out openings. Mounting brackets included. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D=520mm. H=100mm.

Medium-power current. 5010lm. 35W. 5,5kg. Binning initial \leq MacAdam 3. Protection class: IP20. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

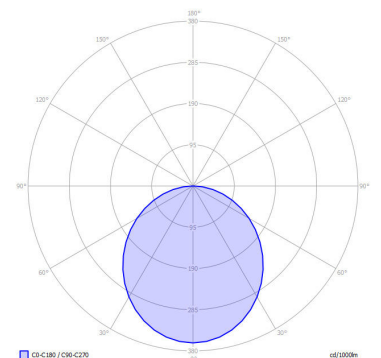

Basic-M4

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Customer / Project: _____

Note: _____



Productname	Basic-M4	Weight (kg)	5,5kg
Lamp	LED		
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl		
Surface finish	Radiant Silver		
Light characteristics	Direct light distribution		
Colour temperature	4000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Opal diffuser		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	D=520mm		
Height H (mm)	H=100mm		
Current/Power	Medium-Power		
Luminous Flux	5010lm		
Watt	35W		
Degree of protection	IP20		
Certification	ENEC		
LED lifetime	L85B10 (tq 25°C) = 50.000h		
Photometric code	8 40 / 3 3 9		
Photobiological class	RG0 (EN62471)		
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C		

