


## Cubic-P6

Pendant luminaire - Direct/indirect light distribution



Illustrations may only be similar and serve as an orientation.

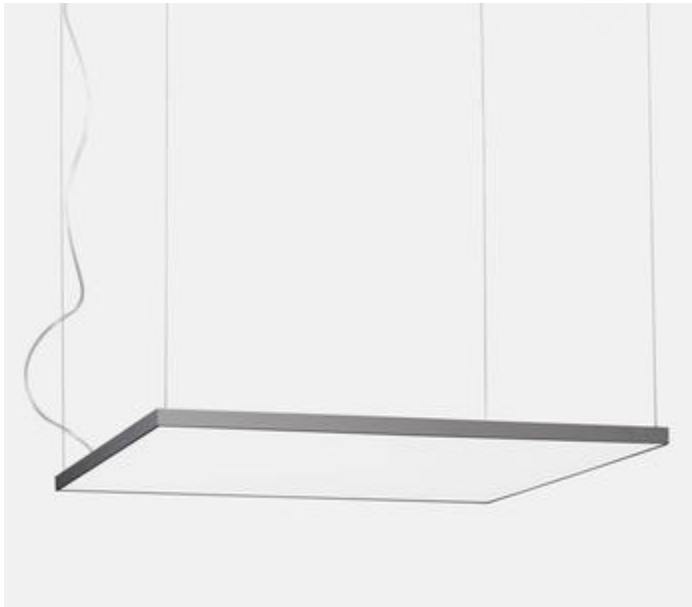

Cubic-P6. LED. Pendant luminaire. Luminaire body with 25mm visible overall height and minimalist edge of only 5mm. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. LxWxH (square). L=600mm. W=600mm. H=25mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set).  
Pendant

length max 1500mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. High-power current. 8639lm. 66W. 7,8kg. Binning initial <= MacAdam 3. Protection class: IP20. Protection class I. CE Declaration of Conformity. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

# Cubic-P6

Pendant luminaire - Direct/indirect light distribution

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_  
 \_\_\_\_\_



Productname	Cubic-P6	LED lifetime	L80B10 (tq 25°C) = 50.000h
Lamp	LED	UGR	UGR<=19
Installation Type	Pendant luminaire	Photometric code	8 30 / 3 3 9
Surface finish	Silver Anodised	Photobiological class	RG0 (EN62471)
Light characteristics	Direct/indirect light distribution	Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Colour temperature	3000K	Weight (kg)	7,8kg
Colour Rendering Index (CRI)	CRI>80		
Optical system	Microprismatic screen		
Control	Switchable		
Length L/Diameter D (mm)	L=600mm		
Width W (mm)	W=600mm		
Height H (mm)	H=25mm		
Current/Power	High-Power		
Luminous Flux	8639lm		
Watt	66W		
Suspension	Parallel cord susp (Set)		
Ceiling rose colour	Ceiling rose: Matching luminaire's surface colour		
Pendant length (mm)	Pendant length max 1500mm		
Degree of protection	IP20		
Cable Colour	Power supply: transparent		

