

## Plug - with screwless terminals for harsh applications




| Product description       |                       |
|---------------------------|-----------------------|
| BALS-Prd.-Nr              | 210761                |
| EAN                       | 4024941146951         |
| Product category          | QUICK-CONNECT TE plug |
| Current                   | 63A                   |
| Number of poles           | 4p                    |
| Arrangement of phases     | 3P+PE                 |
| Position of earth contact | 6 h                   |
| Voltage                   | 380 - 415V~           |
| Frequency                 | 50/60Hz               |

| Product description    |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| Protection degree      | IP44                                                                                                     |
| Colour code            | red RAL 3000                                                                                             |
| Colour of appliance    | Pusher grey RAL 7035, Housing cover red RAL 3000, Collar red RAL 3000, Cable gland grey RAL 7035         |
| Connection design      | screwless spring-clamp technology with box terminals                                                     |
| Maximum conductor size | 16,0 qmm                                                                                                 |
| Cable entry            | with cable gland                                                                                         |
| Height                 | 234mm                                                                                                    |
| Width                  | 97mm                                                                                                     |
| Depth                  | 98mm                                                                                                     |
| Material of enclosure  | Polyamide                                                                                                |
| Contacts               | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties |                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                 | For cable diameter from 16 up to max. 36 mm, Screwless housing connection, MULTI-GRIP cable gland with gasket, integrated cable clamp and additional water evacuation openings |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.66 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941146951 |
| Length         | 98 mm         |
| Width          | 97 mm         |
| Height         | 234 mm        |
| Weight         | 0.661 kg      |
| Volume         | 2,224.404 ccm |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941965415 |
| Length         | 325 mm        |
| Width          | 217 mm        |
| Height         | 210 mm        |
| Weight         | 3.506 kg      |
| Volume         | 13,588.4 ccm  |

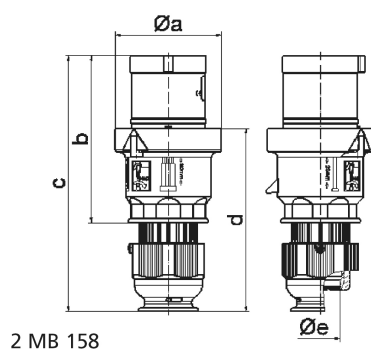

| Ampere                     | 63    | 63    | 63    |  |  |  |  |
|----------------------------|-------|-------|-------|--|--|--|--|
| Polzahl                    | 3     | 4     | 5     |  |  |  |  |
| a $\varnothing$            | 96,0  | 96,0  | 96,0  |  |  |  |  |
| b                          | 153,0 | 153,0 | 153,0 |  |  |  |  |
| c                          | 233,0 | 233,0 | 233,0 |  |  |  |  |
| d                          | 167,0 | 167,0 | 167,0 |  |  |  |  |
| e $\varnothing$            | 36,0  | 36,0  | 36,0  |  |  |  |  |
| Leiter mm <sup>2</sup> min | 6     | 6     | 6     |  |  |  |  |
| Leiter mm <sup>2</sup> max | 16    | 16    | 16    |  |  |  |  |
|                            |       |       |       |  |  |  |  |
|                            |       |       |       |  |  |  |  |
|                            |       |       |       |  |  |  |  |
|                            |       |       |       |  |  |  |  |